


RJ45 FTP TOOLLESS PLUG

PATENTED



①

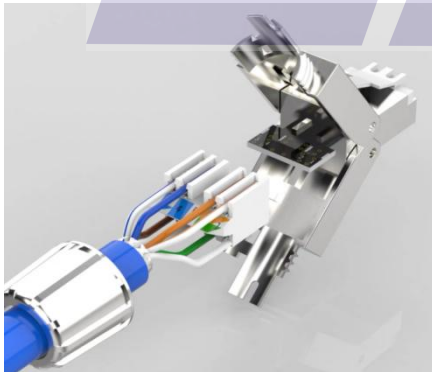

②



TYPE:

1. CAT6A RJ45 SHIELDED TOOLLESS PLUG WITH PLASTIC BATCH
2. COLOUR: METAL COLOR
3. ROHS,REACH COMPLIANT

CABLE MATCHED:

1. SOILD AND STRANDED
2. 22AWG/23AWG/24AWG

ELECTRICAL:

1. CONTACT RESISTANCE: 20m OHM
2. INSULATION RESISTANCE: $\leq 500\text{M OHM @100 V DC}$
3. WITHSTAND VOLTAGE: DC1000V AC700V RMS 60Hz, IMIN
4. CAT6 PERMANENT LINK: CONFORM TO ANSI/TIA/EIA 568B. 2-10

ENVIRONMENTAL:

1. STORAGE: $-40^{\circ} / +70^{\circ}$
2. OPERATION: $-10^{\circ} / +60^{\circ}$

MECHANICAL:

1. SHIELDED MATERIAL: ZINC ALLOY
2. PLASTIC MATERIAL: NEW PC
3. GOLD PINS: PHOSPHOR BRONZE, GOLD PLATING 3U''
4. TERMINAL PINS: STAINLESS STEEL, NICKEL PLATING
5. RJ45 CONTACT LIFE: 750 TIMES MIN
6. IDC TERMINAL LIFE: 250 TIMES MIN

RJ45 FTP TOOLLESS PLUG

